



THE WORLD TO YOUR DOOR



DISTRIBUTION TRUCK BODIES



The Peki Distribution truck body range completes the final mile from distribution centre to end user, bringing the world to your door. It's a body you can rely on, because it's backed by Australia's largest semi-trailer manufacturer.

Peki Distribution combines the best features of earlier Peki models with modern inclusions to complete a stylish truck body for the medium duty market. With a choice of ambient or refrigerated models, durable construction and optimised thermal performance are just some of the features that will deliver savings on your bottom line.

BENEFITS



Backed by the MaxiTRANS Dealer Network - now you can have a truck body with the support that your business expects and demands. In combination with MaxiPARTS, MaxiTRANS lays claim to a network of over 30 parts and service locations around Australia, increasing your uptime and profitability. Here for you today and into the future, Peki is the truck body you can trust.



Excellent thermal performance - fully bonded construction and composite thermal break technology reduce thermal loss through mechanical fastenings and joints, maximising thermal advantages.



Low tare weight - Peki Distribution truck bodies feature a low tare weight starting from just 1635kg.



High productivity - Peki Distribution bodies are designed with maximum internal dimensions, optimising your load capacity.



Durable - standard features such as a galvanised sub frame and door frame provide optimum protection against corrosion. When combined with our aluminium extrusions, Peki Distribution truck bodies represent the ultimate in style and durability.



Easy fitment and maintenance - all Peki Distribution truck bodies are designed with a multi-fit chassis runner for fast installation to all truck makes and models. Additionally, many modular components can be removed or replaced if damaged, maximising uptime.




Extensive options list - a wide variety of options are available, including various internal body heights as well as side, roller, double and triple rear doors.



Two-year warranty - all Peki truck bodies are supported by a two-year manufacturer's warranty.


Visit peki.com.au to find your nearest dealer and complete your final mile solution.

6 PALLET (3.9M)

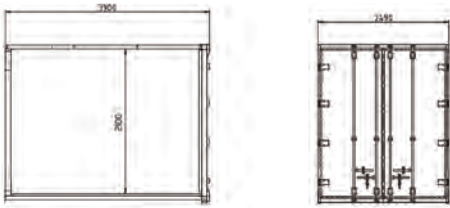


Body Dimensions	AMBIENT	REFRIGERATED
Internal Width	2433mm	2383mm or 2413mm
Internal Height	2100mm	2100mm
External Width	2490mm	2490mm
External Length	3900mm	3900mm
Panel Thickness	AMBIENT	REFRIGERATED
Front Wall	20mm	105mm
Side Walls	20mm	30mm or 45mm
Roof	30mm	30mm or 80mm
Floor	108mm	110mm
Side/Rear Door	18mm	30mm or 45mm
Cubic Capacity	34.1m³	32.8m³
Tare Weight (kg) (approx.)	1635kg	1556kg

8 PALLET (5.1M)

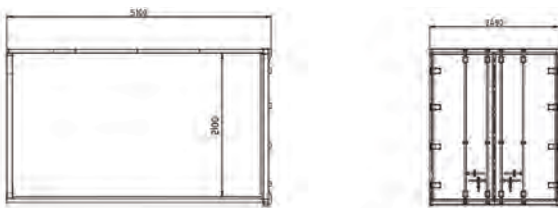


Body Dimensions	AMBIENT	REFRIGERATED
Internal Width	2433mm	2383mm or 2413mm
Internal Height	2100mm	2100mm
External Width	2490mm	2490mm
External Length	5100mm	5100mm
Panel Thickness	AMBIENT	REFRIGERATED
Front Wall	20mm	105mm
Side Walls	20mm	30mm or 45mm
Roof	30mm	30mm or 80mm
Floor	108mm	110mm
Side/Rear Door	18mm	30mm or 45mm
Cubic Capacity	34.1m³	32.8m³
Tare Weight (kg) (approx.)	1954kg	1847kg

10 PALLET (6.3M)

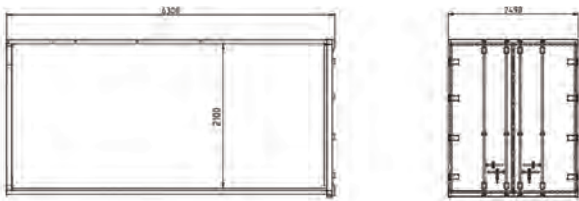

Body Dimensions	AMBIENT	REFRIGERATED
Internal Width	2433mm	2383mm or 2413mm
Internal Height	2100mm	2100mm
External Width	2490mm	2490mm
External Length	6300mm	6300mm
Panel Thickness	AMBIENT	REFRIGERATED
Front Wall	20mm	105mm
Side Walls	20mm	30mm or 45mm
Roof	30mm	30mm or 45mm
Floor	108mm	110mm
Side/Rear Door	18mm	30mm or 45mm
Cubic Capacity	42.3m³	40.7m³
Tare Weight (kg) (approx.)	2270kg	2270kg

12 PALLET (7.5M)

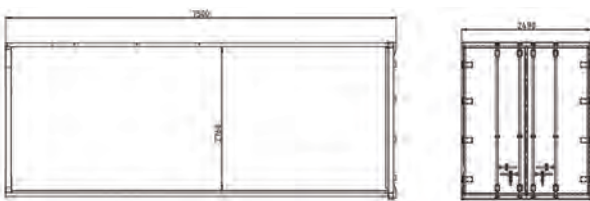

Body Dimensions	AMBIENT	REFRIGERATED
Internal Width	2433mm	2383mm or 2413mm
Internal Height	2100mm/2760mm	2100mm/2760mm
External Width	2490mm	2490mm
External Length	7500mm	7500mm
Panel Thickness	AMBIENT	REFRIGERATED
Front Wall	20mm	105mm
Side Walls	20mm	30mm or 45mm
Roof	30mm	30mm or 80mm
Floor	108mm	110mm
Side/Rear Door	18mm	30mm or 45mm
Cubic Capacity	50.4m³	48.7m³
Tare Weight (kg) (approx.)	2588kg/2789kg	2414kg/2588kg

14 PALLET (8.7M)



Body Dimensions	AMBIENT	REFRIGERATED
Internal Width	2433mm	2383mm or 2413mm
Internal Height	2100mm/2760mm	2100mm/2760mm
External Width	2490mm	2490mm
External Length	8700mm	8700mm
Panel Thickness	AMBIENT	REFRIGERATED
Front Wall	18mm	105mm
Side Walls	18mm	30mm or 45mm
Roof	30mm	30mm or 80mm
Floor	108mm	110mm
Side/Rear Door	18mm	30mm or 45mm
Cubic Capacity	58.5m³	56.6m³
Tare Weight (kg) (approx.)	2904kg/3128kg	2713kg/2905kg

Body dimensions can be varied upon request to suit specific requirements. Fully customised truck bodies are available in the Peki Classic model range. Consult your Peki Dealer for more information.

STANDARD FEATURES



2 X LED HIGH LUMINOSITY INTERIOR LIGHTS



GALVANISED REAR DOOR FRAME



GALVANISED STEEL EXTERNAL LOCK-ROD DOOR HARDWARE



FORKLIFT RATED HIGH PROFILE ALUMINIUM FLOOR



DOUBLE REAR DOORS



ANODISED ALUMINIUM EXTRUSIONS

- LED clearance lights
- Moulded plastic mud guards
- Your choice of preferred body mounted refrigeration plant
- Universal front wall frame to suit off-engine drive units
- Modular rear bumper with light pan pressing
- Fibreglass scuff bands
- Multi-fit chassis runner
- Galvanised sub frame
- Door seals
 - Rubber multi-lip (refrigerated)
 - Co-extruded single-lip (ambient)
- Internal safety door opening (refrigerated only)
- Wall panels
 - Fibreglass and urethane foam insulation (refrigerated)
 - FRP plywood core (ambient)

OPTIONS

- Alternative floor options available
- Single opening side door 900mm x 2000mm
- Double opening side door 1400mm x 1900mm
- Triple rear doors
- Fold away access step
- Multiple temperature zones with fixed, adjustable and removable bulkheads
- Double loader bar system
- Load restraint system
- Tie rail system
- Rubber rear dock buffers
- Additional high luminosity interior lights
- Additional external side clearance lights (within ADR requirements)
- Your choice of preferred tail lift
- Rear work lamp
- Rear vision camera
- Side under run protection
- Toolbox
- Water tank
- Sludge/Drain tank